


- 1.6 GB/s PCI Express (8-lane) interface
- 2 channels sampled at 12-bit resolution
- 500 MS/s real-time sampling rate
- Variable frequency external clocking
- Up to 2 Gigasample dual-port memory
- Optional FPGA-based FFT
- ± 40 mV to ± 4 V input range
- AlazarDSO[®] oscilloscope software
- Software Development Kit supports C/C++, C#, Python, MATLAB[®], LabVIEW[®]
- Support for Windows[®] & Linux[®]

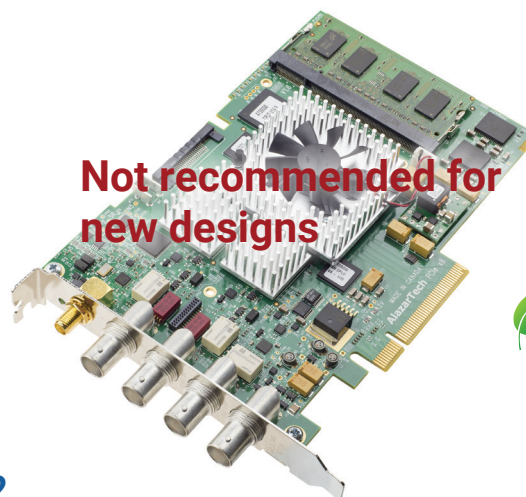

For new designs, please use [ATS9352](#)

Product	Bus	Operating System	Channels	Max. Sample Rate	Bandwidth	Memory Per Channel	Resolution
ATS9350	PCIe x8	64-bit Windows & 64-bit Linux	2	500 MS/s	250 MHz	Up to 2 Giga-samples in single channel mode	12 bits

Overview

AlazarTech ATS[®]9350 is an 8-lane PCI Express (PCIe x8), dual-channel, high-speed, 12-bit, 500 MS/s waveform digitizer card capable of streaming acquired data to PC memory at rates up to 1.6 GB/s or storing it in its deep on-board dual-port acquisition memory buffer of up to 2 Gigasamples.

Up to four ATS9350 boards can be configured as a Leader/Follower system to create a simultaneous sampling system of up to 8 input channels.

Unlike other products on the market, ATS9350 does not use interleaved sampling. Each input has its own 12-bit, 500 MSPS ADC chip.

Optional variable frequency external clock allows operation from 500 MHz down to 2 MHz, making ATS9350 an ideal waveform digitizer for OCT applications.

Users can capture data from one trigger or a burst of triggers. Users can also stream very large datasets continuously to PC memory or hard disk.


ATS9350 is supplied with AlazarDSO software that lets the user get started immediately without having to go through a software development process.

Users who need to integrate the ATS9350 in their own program can purchase a software development kit, ATS-SDK, for C/C++, C#, Python, MATLAB, and LabVIEW for both Windows and Linux operating systems.

All of this advanced functionality is packaged in a low-power, half-length PCI Express card.

Applications

Optical Coherence Tomography (OCT)
Ultrasonic & Eddy Current NDT/NDE
Radar/RF Signal Recording
Terabyte Storage Oscilloscope
High-Resolution Oscilloscope
Lidar
Spectroscopy
Multi-Channel Transient Recording

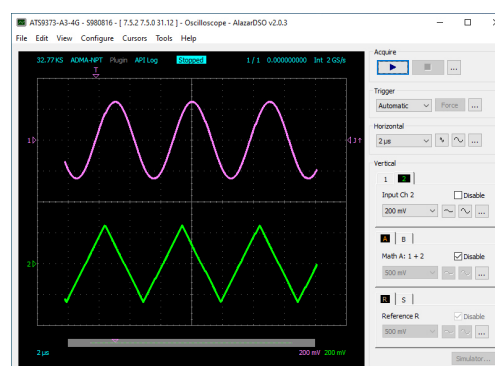

PCI Express Bus Interface

ATS9350 interfaces to the host computer using an 8-lane PCI Express bus. Each lane operates at 2.5 Gbps. PCIe bus specification v1.0a and v1.1 are supported.

According to PCIe specification, an 8-lane board can be plugged into any 8-lane or 16-lane slot, but not into a 4-lane or 1-lane slot. As such, ATS9350 requires at least one free 8-lane or 16-lane slot on the motherboard.

The physical and logical PCIe x8 interface is provided by an on-board FPGA, which also integrates acquisition control functions, memory management functions and acquisition datapath. This very high degree of integration maximizes product reliability.

The AlazarTech® 1.6 GB/s benchmark was done on an ASUS® WS X299 SAGE motherboard.

Users must always be wary of throughput specifications from manufacturers of waveform digitizers. Some unscrupulous manufacturers tend to specify the raw, burst-mode throughput of the bus. AlazarTech, on the other hand, specifies the benchmarked sustained throughput. To achieve such high throughput, a great deal of proprietary memory management logic and kernel mode drivers have been designed.

Analog Input

An ATS9350 features two analog input channels with extensive functionality. Each channel has up to 250 MHz of full power analog input bandwidth. Note that the bandwidth is reduced to 150 MHz for the ± 40 mV range.

With software-selectable attenuation, you can achieve an input voltage range of ± 40 mV to ± 4 V.

It must be noted that input impedance of both channels is fixed at 50 Ω .

Software-selectable AC or DC coupling further increases the signal measurement capability.

Acquisition System

ATS9350 PCI Express digitizers use state of the art 500 MSPS, 12-bit ADCs to digitize the input signals. The real-time sampling rate ranges from 500 MS/s down to 1 KS/s for internal clock and 2 MS/s for external clock.

The two channels are guaranteed to be simultaneous, as the two ADCs use a common clock.

An acquisition can consist of multiple records, with each record being captured as a result of one trigger event. A record can contain both pre-trigger and post-trigger data.

Infinite number of triggers can be captured by ATS9350, when it is operating using dual-port memory.

In between the multiple triggers being captured, the acquisition system is re-armed by the hardware within 256 sampling clock cycles.

This mode of capture, sometimes referred to as Multiple Record, is very useful for capturing data in applications with a very rapid or unpredictable trigger rate. Examples of such applications include medical imaging, ultrasonic testing, OCT and NMR spectroscopy.

On-Board Acquisition Memory

ATS9350 supports on-board memory buffers of 128 Megasamples, 1 Gigasamples and 2 Gigasamples.

Acquisition memory can either be divided equally between the two input channels or devoted entirely to one of the channels.

There are two distinct advantages of having on-board memory:

First, a snapshot of the ADC data can be stored into this acquisition memory at full acquisition speed of $2 \text{ ch} * 500 \text{ MS/s} * 2 \text{ bytes per sample} = 2 \text{ Gigabytes per second}$, which is higher than the maximum PCIe x8 bus throughput of 1.6 GB/s.

Second, and more importantly, on-board memory can also act as a very deep FIFO between the Analog-to-Digital converters and PCI Express bus, allowing very fast sustained data transfers across the bus, even if the operating system or another motherboard resource temporarily interrupts DMA transfers.

Maximum Sustained Transfer Rate

PCI Express support on different motherboards is not always the same, resulting in significantly different sustained data transfer rates. The reasons behind these differences are complex and varied and will not be discussed here.

ATS9350 users can quickly determine the maximum sustained transfer rate for their motherboard by inserting their card in a PCIe slot and running the bus benchmarking tool provided in AlazarDSO for Windows or AlazarFrontPanel for Linux.

ATS9350, which is equipped with dual-port on-board memory, will be able to achieve this maximum sustained transfer rate.


Recommended Motherboards or PCs

Many different types of motherboards and PCs have been benchmarked by AlazarTech. The ones that have produced the best throughput results (as high as 1.7 GB/s for PCIe Gen 1) are listed here: www.alazartech.com/images-media/2246-AlazarTechRecommendedMotherboards.pdf.

It should be noted that some motherboards may behave unexpectedly. For example, one customer purchased a P6T6 motherboard (instead of P6T7) and found that the throughput was limited to approximately 800 MB/s because P6T6 only supports 4-lane PCI Express connection, even though it uses the same x58 chipset.

FPGA-Based FFT Processing

It is possible to do real-time FFT signal processing using the on-board FPGA. Note that only one input can be processed.

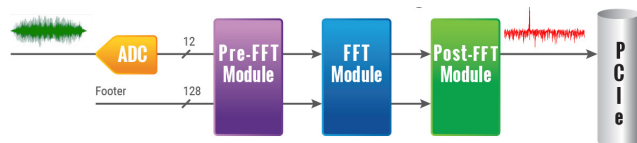

Up to 2048-point FFT length is supported. A user programmable complex windowing function can be applied to the acquired data before FFT calculation.

The complex FFT output is converted to magnitude in single precision floating-point format. A logarithmic output is also available.


It is also possible to DMA both frequency and time domain data. This allows users to verify FPGA-based FFT operation during algorithm development.

ATS9350 can perform 100,000 2048-point FFTs per second.

FPGA-based FFT is ideal for customers in the Optical Coherence Tomography (OCT) field.

Traditional AutoDMA

In order to acquire both pre-trigger and post-trigger data in a dual-ported memory environment, users can use Traditional AutoDMA.

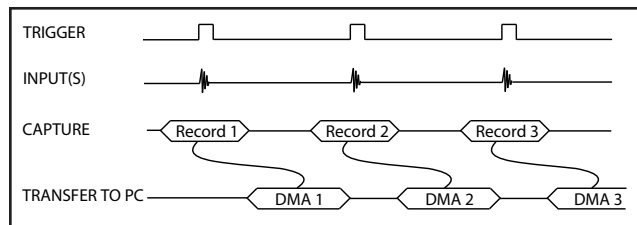

Data is returned to the user in buffers, where each buffer can contain from 1 to 8191 records (triggers). This number is called RecordsPerBuffer.

Users can also specify that each record should come with its own header that contains a 40-bit trigger timestamp.


A BUFFER_OVERFLOW flag is asserted if more than 512 buffers have been acquired by the acquisition system, but not transferred to host PC memory by the AutoDMA engine.

In other words, a BUFFER_OVERFLOW can occur if more than 512 triggers occur in very rapid succession, even if all the on-board memory has not been used up.

No Pre-Trigger (NPT) AutoDMA

Many ultrasonic scanning and medical imaging applications do not need any pre-trigger data: only post-trigger data is sufficient.

NPT AutoDMA is designed specifically for these applications. By only storing post-trigger data, the memory bandwidth is optimized and the entire on-board memory acts like a very deep FIFO.

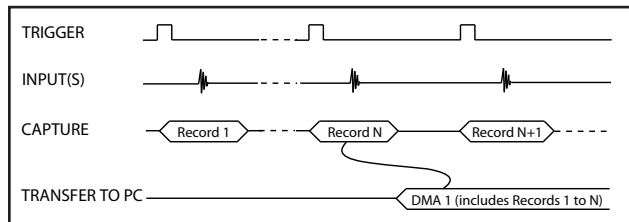

Note that a DMA is not started until RecordsPerBuffer number of records (triggers) have been acquired and written to the on-board memory.

NPT AutoDMA buffers do not include headers. However, users can specify that each record should come with its own footer that contains a 40-bit trigger timestamp. The footer is called NPT Footer.

More importantly, a BUFFER_OVERFLOW flag is asserted only if the entire on-board memory is used up. This provides a very substantial improvement over Traditional AutoDMA.


NPT AutoDMA can easily acquire data to PC host memory at the maximum sustained transfer rate of the motherboard without causing an overflow.

This is the recommended mode of operation for most ultrasonic scanning, OCT and medical imaging applications.

Continuous AutoDMA

Continuous AutoDMA is also known as the data streaming mode.

In this mode, data starts streaming across the PCIe bus as soon as the ATS9350 is armed for acquisition. It is important to note that triggering is disabled in this mode.

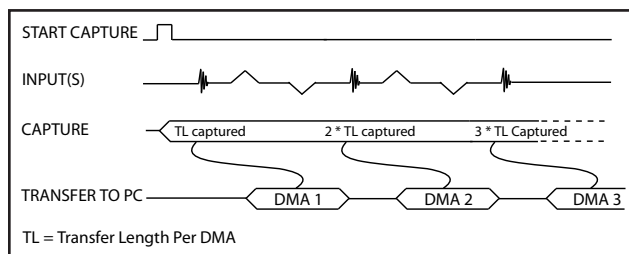

Continuous AutoDMA buffers do not include headers, so it is not possible to get trigger time-stamps.


A BUFFER_OVERFLOW flag is asserted only if the entire on-board memory is used up.

The amount of data to be captured is controlled by counting the number of buffers acquired. Acquisition is stopped by an AbortCapture command.

Continuous AutoDMA can easily acquire data to PC host memory at the maximum sustained transfer rate of the motherboard without causing an overflow. This is the recommended mode for very long signal recording.

Triggered Streaming AutoDMA

Triggered Streaming AutoDMA is virtually the same as Continuous mode, except the data transfer across the bus is held off until a trigger event has been detected.

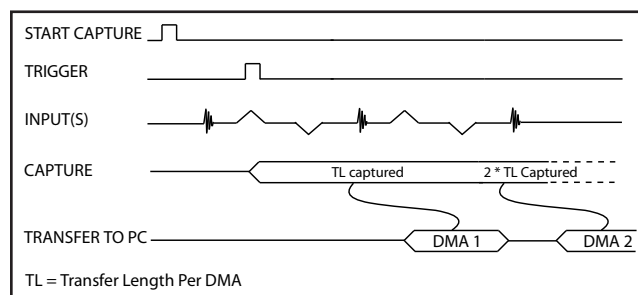

Triggered Streaming AutoDMA buffers do not include headers, so it is not possible to get trigger time-stamps.

A BUFFER_OVERFLOW flag is asserted only if the entire on-board memory is used up.

As in Continuous mode, the amount of data to be captured is controlled by counting the number of buffers acquired. Acquisition is stopped by an AbortCapture command.


Triggered Streaming AutoDMA can easily acquire data to PC host memory at the maximum sustained transfer rate of the motherboard without causing an overflow. This is the recommended mode for RF signal recording that has to be started at a specific time, e.g. based on a GPS pulse.

Leader/Follower Systems

Users can create a multi-board Leader/Follower system by synchronizing up to four ATS9350 boards using an appropriate SyncBoard-9350. Note that ATS9350 board must be hardware version 1.3 or higher.

SyncBoard-9350 is a mezzanine board that connects to the Leader/Follower connector along the top edge of the ATS9350 and sits parallel to the motherboard. For additional robustness, users can secure the SyncBoard-9350 to a bracket mounted on each of the ATS9350 boards.

SyncBoard-9350 is available in different widths: 2x, 4x, 2x-W, 3x-W or 4x-W.

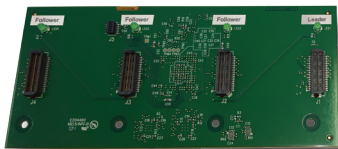

SyncBoards with the -W suffix provide 2-slot spacing between ATS9350 cards to support some of the newer motherboards that space out the on-board x8 or x16 slots by two slots. The -W SyncBoards are also a better solution from thermal point of view, as there is better air flow with 2-slot spacing.

The 2x and 2x-W models allow a 2-board Leader/Follower system; the 3x-W model allows a 2 or 3-board Leader/Follower system; and the 4x and 4x-W models allow 2, 3 or 4 board Leader/Follower systems. The Leader board's clock and trigger signals are copied by the SyncBoard-9350 and supplied to all the Follower boards. This guarantees complete synchronization between the Leader board and all Follower boards.

It should be noted that SyncBoard-9350 does not use a PLL-based clock buffer, allowing the use of variable frequency clocks in Leader/Follower configuration.

A Leader/Follower system samples all inputs simultaneously and also triggers simultaneously on the same clock edge.

Asynchronous DMA Driver

The various AutoDMA schemes discussed above provide hardware support for optimal data transfer. However, a corresponding high-performance software mechanism is also required to make sure sustained data transfer can be achieved.

This proprietary software mechanism is called Async DMA (short for Asynchronous DMA).

A number of data buffers are posted by the application software. Once a data buffer is filled, i.e. a DMA has been completed, ATS9350 hardware generates an interrupt, causing an event message to be sent to the application so it can start consuming data. Once the data has been consumed, the application can post the data buffer back on the queue. This can go on indefinitely.

One of the great advantages of Async DMA is that almost 95% of CPU cycles are available for data processing, as all DMA arming is done on an event-driven basis.

To the best of our knowledge, no other supplier of waveform digitizers provides asynchronous software drivers. Their synchronous drivers force the CPU to manage data acquisition, thereby slowing down the overall data acquisition process.

Output Data Format

By default, ATS9350 data comes out as unsigned binary, where code 0 represents the negative full scale, code $(2^{n-1}-1)$ represents the positive full scale with zero being 2^{n-2} .

It is possible to change the data format to signed binary using an API call. In signed binary format, zero is represented by code 0, positive full scale is represented by $(2^{n-2}-1)$ and negative full scale is represented by (2^{n-2}) .

Triggering

ATS9350 is equipped with sophisticated digital triggering options, such as programmable trigger thresholds and slope on any of the input channels or the External Trigger input.

While most oscilloscopes offer only one trigger engine, ATS9350 offers two trigger engines (called Engines J and K).

The user can specify the number of records to capture in an acquisition, the length of each record and the amount of pre-trigger data.

A programmable trigger delay can also be set by the user. This is very useful for capturing the signal of interest in a pulse-echo application, such as ultrasound, radar, lidar etc.

External Trigger Input

The external trigger input on the ATS9350 is labeled TRIG IN on the face plate.

By default, the input impedance of this input is 50 Ω and the full scale input range is ± 3 Volts. The trigger signal is treated as an analog signal in this situation and a high-speed comparator receives the signal.

Starting with hardware version 1.5, it is also possible to trigger the ATS9350 using a 3.3 V TTL signal. Input impedance is approximately 6.3 k Ω in this mode.

Timebase

ATS9350 timebase can be controlled either by on-board low-jitter VCO or by optional External Clock.

On-board low-jitter VCO uses an on-board 10 MHz TCXO as a reference clock.

Optional External Clock

While the ATS9350 features low-jitter VCO and a 10 MHz TCXO as the source of the timebase system, there may be occasions when digitizing has to be synchronized to an external clock source.

ATS9350 External Clock option provides an SMA input for an external clock signal, which should be a high slew rate signal or LVTTTL signal.

Input impedance for the External Clock input is fixed at 50 Ω . External clock input is always AC-coupled.

There are three types of External Clock supported by ATS9350. These are described below.

Fast External Clock

A new sample is taken by the on-board ADCs for each rising edge of this External Clock signal.

In order to satisfy the clocking requirements of the ADC chips being used, Fast External Clock frequency must always be higher than 2 MHz and lower than 500 MHz.

This is the ideal clocking scheme for OCT applications.

Slow External Clock

This type of clock should be used when the clock frequency is either too slow or is a burst-type clock. Both these types of clock do not satisfy the minimum clock requirements listed above for Fast External Clock.

In this mode, the ATS9350 ADCs are run at a preset internal clock frequency. The user-supplied Slow External Clock signal is then monitored for low-to-high transitions. Each time there is such a transition, a new sample is stored into the on-board memory.

It should be noted that there can be a 0 to +8 ns sampling jitter when Slow External Clock is being used, as the internal ADC clock is not synchronized to the user-supplied clock.

10 MHz Reference Clock


It is possible to generate the sampling clock based on an external 10 MHz reference input. This is useful for RF systems that use a common 10 MHz reference clock.

ATS9350 uses an on-board low-jitter VCO to generate the 500 MHz high-frequency clock used by the ADC. This 500 MHz sampling clock can then be decimated by a factor of 1, 2, 5, 10 or any other integer value that is divisible by 5.

OCT Ignore Bad Clock

The ADCs used on the ATS9350 require the external clock frequency to be above 2 MHz and lower than 500 MHz. In OCT applications, these limits cannot always be respected due to the nature of the optical source.

AlazarTech's *OCT Ignore Bad Clock* technology, allows safe operation with these out-of-specification clocks without requiring the use of a dummy clock in the source.

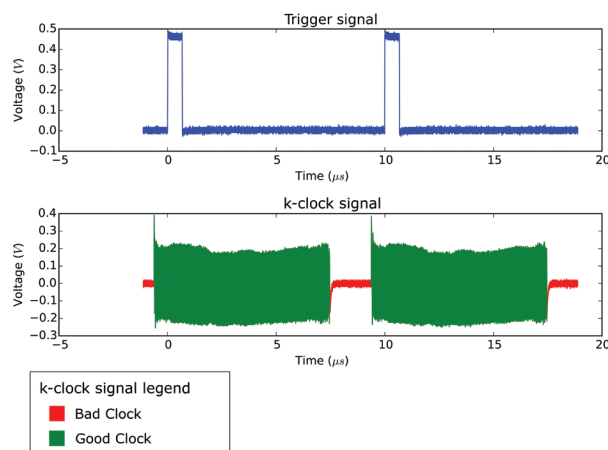

Firmware version 21.02+, driver version 5.10.6+ and SDK 7.1.3+ are required to take advantage of OCT Ignore Bad Clock. For existing customers, these firmware and driver versions are available for download from AlazarTech's website free of charge.

See www.alazartech.com/en/technology/oct-ignore-bad-clock/ for more information on this technology.

AUX Connector

ATS9350 provides an AUX (Auxiliary) BNC connector that is configured as a Trigger Output connector by default.

When configured as a Trigger Output, AUX BNC connector outputs a 5 Volt TTL signal synchronous to the ATS9350 Trigger signal, allowing users to synchronize their test systems to the ATS9350 Trigger.

When combined with the Trigger Delay feature of the ATS9350, this option is ideal for ultrasonic and other pulse-echo imaging applications.

AUX connector can also be used as a Trigger Enable Input, or "Frame Start" input, which can be used to acquire complete frames, or B-scans, in imaging applications. In fact, this is the most popular use of the AUX connector in OCT applications.

Calibration

Every ATS9350 digitizer is factory calibrated to NIST- and CNRC-traceable standards. To recalibrate an ATS9350, the digitizer must be shipped back to the factory.

On-Board Monitoring

Adding to the reliability offered by ATS9350 are the on-board diagnostic circuits that constantly monitor over 20 different voltages, currents and temperatures. LED alarms are activated if any of the values surpass the limits.

AlazarDSO Software

ATS9350 is supplied with the powerful AlazarDSO software that allows the user to setup the acquisition hardware and capture, display and archive the signals.

The Stream-To-Memory command in AlazarDSO allows users to stream a large dataset to motherboard memory.

AlazarDSO software also includes powerful tools for benchmarking the computer bus and disk drive.

Software Development Kits

AlazarTech provides an easy-to-use software development kit for customers who want to integrate the ATS9350 into their own software.

A Windows-compatible software development kit, called ATS-SDK, includes headers, libraries and source code sample programs written in C/C++, C#, Python, MATLAB, and LabVIEW.

A Linux-compatible software development kit, called ATS-devel, includes headers, libraries and source code sample programs written in C++ and Python.

These programs can fully control the ATS9350 and acquire data in user buffers.

The purchase of an ATS-SDK license includes a subscription that allows users to download ATS-SDK updates from the AlazarTech website for period of 12 months from the date of purchase.

Customers who want to download new releases beyond this 12 month period should purchase extended maintenance (order number ATS-SDK-1YR).

ATS-GPU

ATS-GPU is a software library developed by AlazarTech to allow users to do real-time data transfer from ATS9350 to a GPU card at rates up to 1.6 GB/s.

Interfacing waveform digitizers to GPUs involves creating a software mechanism to move data from one to the other and back to user buffers. The standard techniques used most often can get the job done, but feature very low data throughput due to software overheads.

AlazarTech designed ATS-GPU to eliminate this software bottleneck so that data can be moved from AlazarTech digitizers to GPUs and from GPUs to user buffers at full PCIe bus speeds. Once the data is available in GPU memory, many types of digital signal processing (DSP) can be done on this data at near-hardware speeds.

ATS-GPU-BASE is supplied with an example user application in source code. The application includes GPU kernels that use ATS-GPU to receive data, do very simple signal processing (data inversion), and copy the processed (inverted) data back to a user buffer. All this is done at the highest possible data transfer rate.

Programmers can replace the data inversion code with application-specific signal processing kernels to develop custom applications.

ATS-GPU-OCT is the optional OCT Signal Processing library for ATS-GPU. It contains floating-point FFT routines that have also been optimized to provide the maximum number of FFTs per second. Kernel code running on the GPU can do zero-padding, apply a windowing function, do a floating-point FFT, calculate the amplitude and convert the result to a log scale. It is also possible to output phase information.

FFTs can be done on triggered data or on continuous gapless stream of data. It is also possible to do spectral averaging. Our benchmarks showed that it was possible to do 480,000 FFTs per second when capturing data in dual-channel mode and using a NVIDIA® Quadro® P5000 GPU.

ATS-GfPU-NUFFT is an extension of ATS-GPU-OCT that allows non-uniform FFTs to be performed on data acquired uniformly in time domain using a fixed sampling rate. For SS-OCTs where the wavelength does not vary linearly in time, a fixed sampling rate results in data that is non-uniformly distributed in frequency domain. ATS-GPU-NUFFT allows linearized FFTs to be performed on such data.

ATS-GPU supports 64-bit Windows and 64-bit Linux for CUDA®-based development.

Support for Windows

Windows support for ATS9350 includes Windows 11, Windows 10, Windows Server® 2019, and Windows Server 2016. As Windows Server 2019 and 2016 are seldom used by our customers, they are expected to



ATS9350

500 MS/s 12-Bit PCI Express Digitizer

work but are not regularly tested with each software release. If there are issues related to Windows Server 2016 or 2019, tech support may not be as rapid as for other operating systems.

Only 64-bit Windows operating systems are supported. The last 32-bit Windows driver is version 5.10.24, which supports Windows 7.

Microsoft mainstream support ended in 2018 for Windows 8.1 and Windows Server 2012 R2. As such, AlazarTech has ceased development on these operating systems. Current software and driver releases may work with these operating systems but they are not officially supported.

Due to lack of demand and due to the fact that Microsoft no longer supports these operating systems, AlazarTech no longer supports Windows 8, Windows 7, Windows XP, Windows Vista, Windows Server 2012, Windows Server 2008 R2, and Windows Server 2008.

Linux Support

AlazarTech offers Dynamic Kernel Module Support (DKMS) drivers for the following Linux distributions: Ubuntu, Debian, and RHEL®.

AlazarTech DKMS drivers may work for other Linux distributions but they have not been tested and technical support may be limited.

Users can download the DKMS driver and associated library for their specific distribution here:

www.alazartech.com/en/linux-drivers/ats9350/8/

Only 64-bit Linux operating systems are supported.

A GUI application called AlazarFrontPanel that allows simple data acquisition and display is also provided.

ATS-SDK includes source code example programs for Linux, which demonstrate how to acquire data programmatically using a C compiler. Note that example programs are only provided for Python and C++.

Based on a minimum annual business commitment, the Linux driver source code license (order number ATS9350-LINUX) may be granted to qualified OEM customers for a fee. For release of driver source code, a Non-Disclosure Agreement must be executed between the customer's organization and AlazarTech.

All such source code disclosures are made on an as-is basis with limited support from the factory.

Accessories for Out-of-Warranty Products

Accessories, such as SyncBoards, purchased for use with in-warranty digitizer cards will be covered by a 1-year warranty.

Accessories purchased for use with out-of-warranty digitizers will not be warranted against defects in materials and workmanship. As AlazarTech cannot verify

with certainty that the cause of any malfunction is not due to the non-warranted digitizer, accessories purchased for out-of-warranty digitizers will require a warranty waiver.

Upgrading Your Digitizer in The Field

It is always recommended to get upgrades installed at the factory with the initial digitizer purchase.

If the digitizer is still under warranty, it may be possible to add certain upgrades in the field, but there is a small chance that the upgrade will not work, in which case the digitizer would need to be returned to the factory to complete the upgrade.

If the digitizer is no longer under warranty, the upgrade must be done at the factory and there will be a minimum service charge in addition to the cost of the upgrade. This is so that AlazarTech can verify that the digitizer meets basic performance levels prior to any upgrade.

Technical Support

AlazarTech is known for its world-class technical support. Customers receive free technical support on hardware products that are under warranty.

AlazarTech digitizers come with a standard one (1) year parts and labor warranty. This warranty can be extended for a fee (more information can be found in the *Extended Warranty* section below).

If your waveform digitizer is out of warranty, you will not be eligible for free technical support on AlazarTech hardware or software products and you will need to purchase technical support hours (order number SUPPORT-HR5) to obtain assistance.

In addition, any necessary repairs to your out-of-warranty hardware products will carry a minimum bench charge.

Extended Warranty

The purchase of an ATS9350 includes a standard one (1) year parts and labor warranty. Customers may extend their warranty by ordering the appropriate Extended Warranty:

ATS9350-061 for ATS9350-128M
ATS9350-062 for ATS9350-1G
ATS9350-063 for ATS9350-2G

This must be purchased before expiration of the standard warranty (or before expiration of an Extended Warranty). Extended Warranties can only be purchased while there is a valid warranty in place.

Users can purchase up to 4 (four) additional years of warranty extensions for a maximum total of 5 years of warranty.

Get your warranty end date by registering your product at: www.alazartech.com/en/my-account/my-products/.



ATS9350

500 MS/s 12-Bit PCI Express Digitizer

Export Control Classification

According to the Export Controls Division of Government of Canada, ATS9350 is currently not controlled for export from Canada. Its export control classification is N8, which is equivalent to ECCN EAR99. ATS9350 can be shipped freely outside of Canada, with the exception of countries listed on the [Area Control List](#) and [Sanctions List](#). Furthermore, if the end-use of ATS9350, in part or in its entirety, is related to the development or deployment of weapons of mass destruction, AlazarTech is obliged to apply for an export permit.

RoHS Compliance

ATS9350 is fully RoHS compliant, as defined by Directive 2015/863/EU (RoHS 3) of the European Parliament and of the Council of 31 March 2015 on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

All manufacturing is done using RoHS-compliant components and lead-free soldering.

EC Conformity

ATS9350 conforms to the following standards:

Electromagnetic Emissions:
CISPR 32:2015/AMD1:2019 /
EN 55032:2015/A11:2020 (Class A):
Multimedia Equipment (MME). Radio disturbance characteristics. Limits and method of measurement:
EN 61000-3-2:2014, EN 61000-3-3:2013.

Electromagnetic Immunity:
EN 55035:2017/A11:2020:
Multimedia Equipment (MME) Immunity characteristics — Limits and methods of measurement.

Safety:
IEC 62368-1:2014 / EN 62368-1:2014+A11:2017:
Audio/video, information and communication technology equipment - Part 1: Safety requirements.

ATS9350 also follows the provisions of the following directives: 2014/35/EU (Low Voltage Equipment); 2014/30/EU (Electromagnetic Compatibility).

FCC & ICES-003 Compliance

ATS9350 has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15, subpart B of the FCC Rules, and the Canadian Interference-Causing Equipment Standard ICES-003 issue 7 October 2020.

ORDERING INFORMATION

ATS9350-128M	ATS9350-102
ATS9350-1G	ATS9350-103
ATS9350-2G	ATS9350-104
ATS9350: External Clock Upgrade	ATS9350-005
SyncBoard-9350 2x	ATS9350-006
SyncBoard-9350 4x	ATS9350-007
ATS9350-128M to 1G Upgrade	ATS9350-010
ATS9350-128M to 2G Upgrade	ATS9350-011
ATS9350-1G to 2G Upgrade	ATS9350-012
SyncBoard-9350 2x-W	ATS9350-020
SyncBoard-9350 3x-W	ATS9350-021
SyncBoard-9350 4x-W	ATS9350-022
ATS9350-128M: One Year Extended Warranty	ATS9350-061
ATS9350-1G: One Year Extended Warranty	ATS9350-062
ATS9350-2G: One Year Extended Warranty	ATS9350-063
ATS-SDK purchased with a digitizer board or ATS-GPU: License + 1 Year Subscription (Supports C/C++, Python, MATLAB, and LabVIEW)	ATS-SDK
ATS-SDK purchased separately: License + 1 Year Subscription + 5 hours of technical support (Supports C/C++, Python, MATLAB, and LabVIEW)	ATS-SDK-WOD
ATS-GPU-BASE: GPU Streaming Library License + 1 Year Subscription	ATSGPU-001
ATS-GPU-OCT: Signal Processing Library License + 1 Year Subscription (requires ATSGPU-001)	ATSGPU-101
ATS-GPU-NUFFT: ATS-GPU-OCT Extension for fixed-frequency sampled data License + 1 Year Subscription (requires ATSGPU-001 & ATSGPU-101)	ATSGPU-201
5 Hours of technical support	SUPPORT-HR5

† AlazarDSO, AlazarTech, and AlazarTech ATS are registered trademarks of Alazar Technologies Inc.
MATLAB is a trademark and/or registered trademark of The MathWorks, Inc.
LabVIEW is a trademark and/or registered trademark of National Instruments.
Windows and Windows Server are trademarks and/or registered trademarks of Microsoft Corporation in the U.S. and/or other countries.
Linux is a registered trademark of Linus Torvalds.
CUDA, NVIDIA, and Quadro are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and/or other countries.
ASUS is either a US registered trademark or trademark of ASUSTeK Computer Inc. in the United States and/or other countries.
RHEL is a registered trademark of Red Hat, Inc. in the United States and other countries.
All other trademarks are the property of their respective owners.

Manufactured By:

Alazar Technologies, Inc.

6600 TRANS-CANADA HIGHWAY, SUITE 310
POINTE-CLAIRE, QC, CANADA H9R 4S2

TOLL FREE: 1-877-7-ALAZAR OR 1-877-725-2927
TEL: (514) 426-4899 FAX: (514) 426-2723

E-MAIL: sales@alazartech.com



ATS9350

500 MS/s 12-Bit PCI Express Digitizer

System Requirements

Personal computer with at least one free x8 or x16 PCI Express (v1.0a, v1.1 or v2.0) slot, 2 GB RAM, 100 MB of free hard disk space, SVGA display adaptor and monitor with at least a 1024 x 768 resolution.

Power Requirements

+12 V	1.2 A, typical
+3.3 V	1.1 A, typical

Physical

Size	Single slot, half length PCI Express card (4.377 inches x 6.5 inches excluding the connectors protruding from the front panel)
Weight	250 g

I/O Connectors

CH A, CH B, TRIG IN, AUX I/O ECLK	BNC female connectors SMA female connector
---	---

Environmental

Operating temperature	0 to 55 degrees Celsius
Storage temperature	-20 to 70 degrees Celsius
Relative humidity	5 to 95%, non-condensing

Acquisition System

Resolution	12 bits
Bandwidth (~3 dB)	
DC-coupled, 50 Ω	± 40 mV range: DC - 150 MHz All other ranges: DC - 250 MHz
AC-coupled, 50 Ω	± 40 mV range: 100 kHz - 150 MHz All other ranges: 100 kHz - 250 MHz
Number of channels	2, simultaneously sampled
Maximum sample rate	500 MS/s single shot
Minimum sample rate	1 KS/s single shot for internal clocking
Full scale input ranges	
50 Ω input impedance:	± 40 mV, ± 100 mV, ± 200 mV, ± 400 mV, ± 1 V, ± 2 V, and ± 4 V, software-selectable
DC accuracy	$\pm 2\%$ of full scale in all ranges
Input coupling	AC or DC, software-selectable
Input impedance	50 $\Omega \pm 1\%$
Absolute maximum input	
50 Ω	± 4 V (DC + peak AC for CH A, CH B, and TRIG IN only without external attenuation)

Acquisition Memory System

Memory size	128 MegaSamples, 1 GigaSamples or 2 GigaSamples
Record length	Software-selectable with 32-point resolution. Record length must be a minimum of 256 points. There is no upper limit on the maximum record length.

Number of records	Software-selectable from a minimum of 1 to a maximum of infinite number of records
Pre-trigger depth	From 0 to 4080 for single channel in NPT mode From 0 to 2040 for dual channel in NPT mode
Post-trigger depth	Record Length - Pre-Trigger Depth

Timebase System

Timebase options	Internal Clock or External Clock (Optional)
Internal sample rates	500 MS/s, 250 MS/s, 100 MS/s, 50 MS/s, 20 MS/s, 10 MS/s, 5 MS/s, 2 MS/s, 1 MS/s, 500 KS/s, 200 KS/s, 100 KS/s, 50 KS/s, 20 KS/s, 10 KS/s, 5 KS/s, 2 KS/s, 1 KS/s
Internal clock accuracy	± 2 ppm

Dynamic Parameters

Typical values measured on the 400 mV range of CH A of a randomly selected ATS9350. Input signal was provided by a Rohde & Schwarz SMB100A signal generator, followed by a 9-pole, 10 MHz band-pass filter (TTE Q36T-10M-1M-50-720BMF). Input frequency was set at 9.9 MHz and output amplitude was 270 mV rms at the board's input, which is approximately 95% of the full scale input.

SNR	53.93 dB
SINAD	53.74 dB
SFDR	73.43 dB
THD	-67.61 dB
ENOB	8.63

Note that these dynamic parameters may vary from one unit to another, with input frequency and with the full scale input range selected.

Optional ECLK (External Clock) Input

Input impedance	50 Ω
Input coupling	AC

Fast External Clock

Signal level	500 mV _{p-p} to 2 V _{p-p}
Maximum frequency	500 MHz
Minimum frequency	2 MHz
Sampling edge	Rising

Slow External Clock

Signal Level	3.3 V LVTTTL
Maximum frequency	60 MHz
Minimum frequency	DC

Optional 10 MHz Reference PLL Input

Signal level	500 mV _{p-p}
Input impedance	50 Ω
Input coupling	AC
Input frequency	10 MHz \pm 0.1 MHz
Maximum frequency	10.1 MHz
Minimum frequency	9.9 MHz
Sampling clock freq.	500 MHz

Triggering System

Mode	Edge triggering with hysteresis
Comparator type	Digital comparators for internal (CH A, CH B) triggering and software-selectable analog comparators or TTL [†] gate for TRIG IN (External) triggering
Number of trigger engines	2
Trigger engine combination	Engine J, engine K, J OR K, software-selectable
Trigger engine source	CH A, CH B, EXT, Software or None, independently software-selectable for each of the two Trigger Engines
Hysteresis	±5% of full scale input, typical
Trigger sensitivity	±10% of full scale input range, except for TTL [†] triggering for EXT. This implies that the trigger system may not trigger reliably if the input has an amplitude less than ±10% of full scale input range selected
Trigger level accuracy	±5%, typical, of full scale input range of the selected trigger source
Bandwidth	250 MHz
Trigger delay	Software-selectable from 0 to 9,999,999 sampling clock cycles
Trigger timeout	Software-selectable with a 10 μ s resolution. Maximum settable value is 3,600 seconds. Can also be disabled to wait indefinitely for a trigger event

TRIG IN (External Trigger) Input

Input type	Analog or 3.3 V TTL [†] , software-selectable
Input coupling	DC only
Analog input impedance	50 Ω
Analog bandwidth (-3 dB)	DC - 250 MHz
Analog input range	±3 V
Analog DC accuracy	±10% of full scale input
Analog absolute max. input	±8 V (DC + peak AC without external attenuation)
TTL [†] input impedance	6.3 k Ω ±10%
TTL [†] min. pulse width	32 ADC sampling clocks
TTL [†] min. pulse amplitude	2 Volts
TTL [†] absolute max. input	-0.7 V to +5.5 V

Auxiliary I/O (AUX I/O)

Signal direction	Input or Output, software-selectable. Trigger Output by default
Output types:	Trigger Output, Pacer (programmable clock) Output, Software-controlled Digital Output
Input types:	Trigger Enable Software readable Digital Input
Output	
Amplitude:	5 Volt TTL
Synchronization:	Synchronized to a clock derived from the ADC sampling clock. Divide-by-4 clock (dual channel mode) or divide-by-8 clock (single channel mode)

Input

Amplitude:	3.3 Volt TTL (5 Volt compliant)
Input coupling:	DC

Materials Supplied

ATS9350 PCI Express card
ATS9350 Installation Disk (on USB Flash Drive)

Certification and Compliances

RoHS 3 (Directive 2015/863/EU) Compliance
CE Marking — EC Conformity
FCC Part 15 Class A / ICES-003 Class A Compliance

[†]Triggering with TTL signal is available with hardware version 1.5 and higher.

All specifications are subject to change without notice

Part numbers ATS9350-002, ATS9350-003 and ATS9350-004 have been discontinued and replaced respectively by ATS9350-102, ATS9350-103, and ATS9350-104, which include 2048-point FFT processing in the FPGA in addition to all the functionality of the discontinued products. New products are fully backward compatible and previously developed software will continue to work with the new products. Only the new part numbers will be shipped from here on in.

DATASHEET REVISION HISTORY

Changes from version 2.00 (July 2022) to version 2.0P

	Section, Page
Removed 32-bit Windows	Feature Table, pg. 1
Added new section to specify default output data format is unsigned binary and that it can be changed to signed binary via an API call.	Output Data Format, pg. 4
Separate description for Linux SDK to detail supported programming languages	Software Development Kits, pg. 6
Noted that only 64-bit Windows is supported and that the last driver version that supports 32-bit Windows is 5.10.24.	Support for Windows, pg. 6
Updated download link for the Linux driver and associated library, and added note: ATS-SDK example programs are only provided for Python and C++	Linux Support, pg. 7
Added new section to detail AlazarTech's accessory policy	Accessories for Out-of-Warranty Products, pg. 7
Added new section to detail AlazarTech's upgrade policy	Upgrading Your Digitizer in The Field, pg. 7

Changes from version 2.0N (Oct 2021) to version 2.00

	Section, Page
Changes to maintenance subscription inclusions: removed technical support	Software Development Kits, pg. 6
Added Windows 11	Support for Windows, pg. 6
Added new section to specify how AlazarTech handles technical support: Customers receive free technical support on hardware products that are under warranty. Out-of-warranty support requires the purchase of support hours.	Technical Support, pg. 7
Updated name for product <i>Software Development Kit</i> Now called: <i>ATS-SDK purchased with a digitizer board or ATS-GPU</i>	Ordering Information, pg. 8
Added products ATS-SDK-WOD and SUPPORT-HR5	Ordering Information, pg. 8
Updated specification name from <i>Input protection</i> to <i>Absolute maximum input</i> Actual value did not change.	Acquisition System, pg. 9
Updated specification name from <i>Input protection</i> to <i>Absolute maximum input</i> Actual value did not change.	TRIG IN (External Trigger) Input, pg. 10

Changes from version 2.0M (Oct 2021) to version 2.0N

	Section, Page
Added note to advise that ATS9350 is not recommended for new designs Suggested replacement is ATS9352	pg. 1
Changed term for multi-board system to <i>Leader/Follower</i>	Leader/Follower Systems, pg. 4
Specified number of extended warranties that users may purchase	Extended Warranty, pg. 7

Changes from version 2.0L (June 2020) to version 2.0M

	Section, Page
Updated support status for Windows 8.x and Windows Server versions 2012 R2, 2016, 2019	Support for Windows, pg. 6
Updated Linux Support: only 64-bit Linux operating systems are supported	Linux Support, pg. 7
Changed terminology from <i>Information Technology Equipment (ITE)</i> to <i>Multimedia Equipment (MME)</i>	EC Conformity, pg. 7

Changes from version 2.0K (Apr 2020) to version 2.0L

	Section, Page
Updated motherboard used for benchmarking	PCI Express Bus Interface, pg. 2
Updated OCT Ignore Bad Clock URL	OCT Ignore Bad Clock, pg. 5
Updated section <i>ATS-GPU</i> and added paragraph on ATS-GPU-NUFFT	ATS-GPU, pg. 6
Updated Linux Support (RHEL) and added new DKMS drivers	Linux Support, pg. 7
Updated product registration URL	Extended Warranty, pg. 7
Updated standards and directives	EC Conformity, pg. 7
Updated year of ICES-003 standard	FCC & ICES-003 Compliance, pg. 7
Corrected TRIG IN Input type, removed: (5 V compliant)	TRIG IN (External Trigger) Input, pg. 9
Added Auxiliary I/O input coupling (DC)	Auxiliary I/O (AUX I/O), pg. 9
Updated software descriptions and added order number for ATS-GPU-NUFFT	Ordering Information, pg. 9

Changes from version 2.0J (Apr 2020) to version 2.0K

	Section, Page
Removed section on Data Packing Mode; this mode is not supported on ATS9350	Data Packing Mode, pg. 4

Changes from version 2.0I (Jan 2020) to version 2.0J

	Section, Page
Updated Dynamic Parameters. Changes are due to new testing methodology	Dynamic Parameters, pg. 8

DATASHEET REVISION HISTORY

Changes from version 2.0H (May 2019) to version 2.0I

Section, Page

Changed <i>Sampling Rate</i> column to <i>Max. Sample Rate</i>	Feature Table, pg. 1
Added AlazarFrontPanel (for Linux) as benchmarking tool	Maximum Sustained Transfer Rate, pg. 2
Replaced signal sine wave requirement with high slew rate for external clock signal	Optional External Clock, pg. 5
Removed qualified metrology lab as option for recalibrating ATS9350	Calibration, pg. 6
Specified Windows 7 version support, re-ordered list of operating systems, and added end-of-support notice for Windows 7 and Windows Server 2008 R2	Support for Windows, pg. 6
Specified Linux distributions: CentOS, Debian, and Ubuntu	Linux Support, pg. 6
Input Protection: changed External Trigger reference from "EXT" to "TRIG IN" in order to match bracket label	Acquisition System, pg. 8
Clarified specifications by separating Fast and Slow External Clock	Optional ECLK (External Clock) Input, pg. 8
Changed fast external clock signal level from " ± 200 mV" to " 500 mV _{p-p} to 2 V _{p-p} "	
Removed sine wave requirement	
Changed signal level from ± 200 mV to 500 mV _{p-p}	Optional 10 MHz Reference PLL Input, pg. 8
Removed sine wave requirement and reference to slow external clock	
Corrected Output types (removed Busy Output and added Pacer Output)	Auxiliary I/O (AUX I/O), pg. 9

Changes from version 2.0G (Jan 2019) to version 2.0H

Section, Page

Updated ATS-GPU benchmarks (FFTs per second, number of channels, and GPU)	ATS-GPU, pg. 6
Removed <i>ATS-GMA</i> section as this product is being discontinued	ATS-GMA, pg. 6
Added section <i>Extended Warranty</i>	Extended Warranty, pg. 7
Updated and moved Trademark information from end of document to page 7	pg. 7
Specified that listed Pre-trigger depth applies to NPT mode	Acquisition Memory System, pg. 8
Removed ATS-GMA order numbers (ATSGMA-001, ATSGMA-101)	Ordering Information, pg. 9

Changes from version 2.0F (Sept 2018) to version 2.0G

Section, Page

Updated <i>Sanctions List</i> URL	Export Control Classification, pg. 7
Updated Trademark information	pg. 9

Changes from version 2.0E (Jan 2018) to version 2.0F

Section, Page

Updated RoHS Compliance to RoHS 3	Global change
Clarified Operating System Support	Feature Table, pg. 1
Updated <i>Recommended Motherboards or PCs</i>	Recommended Motherboards or PCs, pg. 2
Correction of trigger engines: changed to J and K (instead of X and Y)	Triggering, pg. 5
Removed <i>Dummy Clock Switchover</i> , functionality replaced by <i>OCT Ignore Bad Clock</i>	Dummy Clock Switchover, pg. 6
Added information on ATS-SDK license	Software Development Kits, pg. 6
Specified 64-bit version for Windows and Linux support	ATS-GPU, pg. 6
Added <i>ATS-GMA</i> section	ATS-GMA, pg. 6
Added list of supported Microsoft Windows versions	Support for Windows, pg. 7
Removed Bandwidth Flatness	Acquisition System, pg. 8
Removed <i>Amplifier Bypass Mode</i> section	Amplifier Bypass Mode, pg. 8
Added <i>Acquisition Memory System</i> section	Acquisition Memory System, pg. 8
Added Maximum Amplitude: 2 V _{p-p}	Optional ECLK (External Clock) Input, pg. 8
Removed <i>Dummy Clock Switchover</i> , functionality replaced by <i>OCT Ignore Bad Clock</i>	Dummy Clock Switchover, pg. 8
Added "PLL" to section name for clarity, corrected Input Frequency tolerance, and added Max. and Min. Frequencies	Optional 10 MHz Reference PLL Input, pg. 8
Corrected Trigger Engine Combination	Triggering System, pg. 9
Clarified specs by providing separate specifications for Analog and TTL input, Added TTL min. pulse width, TTL min. pulse amplitude, and TTL input protection	TRIG IN (External Trigger) Input, pg. 9
Replaced <i>TRIG OUT Output</i> section with <i>Auxiliary I/O (AUX I/O)</i>	Auxiliary I/O (AUX I/O), pg. 9
Added Trademark information	pg. 9

DATASHEET REVISION HISTORY

Changes from version 2.0E (Jan 2018) to version 2.0F (continued)

Added subscription length for ATS-SDK, ATSGPU-001, ATSGPU-101
Added products ATSGMA-001, ATSGMA-101

Section, Page
Ordering Information, pg. 10

Changes from version 2.0D (Oct 2017) to version 2.0E

Updated and moved section on FPGA-based FFT from page 6
Added note about NPT Footers
Added section on Data Packing Mode
Added section on OCT Ignore Bad Clock
Removed section on k-clock Deglitching Firmware
Removed note about k-clock Deglitching Firmware
Added CNRC as calibration standard
Added note about Trigger Enable Input use in OCT
Added -BASE and -OCT to ATS-GPU description for clarity
Corrected size of card
Removed product ATS9350-014 (k-clock Deglitching Firmware)
Updated email address

Section, Page
FPGA-based FFT Processing, pg. 3
No Pre-Trigger (NPT) AutoDMA, pg. 3
Data Packing Mode, pg. 4
OCT Ignore Bad Clock, pg. 5
Optional k-Clock Deglitching Firmware, pg. 5
Dummy Clock Switchover, pg. 5
Calibration, pg. 5
AUX Connector, pg. 6
ATS-GPU, pg. 6
Physical, pg. 8
Ordering Information, pg. 9
Manufactured By, pg. 9

Changes from version 2.0C (Sept 2017) to version 2.0D

Updated description for product ATSGPU-001 & ATSGPU-101

Section, Page
Ordering Information System, pg. 9

Changes from version 2.0B (June 2017) to version 2.0C

Added 2-slot-spacing SyncBoards (-W models)
Specified conditions for obtaining a Linux driver source code license
Added Export Control Classification information
Removed product ATS9350-LINUX
Added products ATS9350-061, ATS9350-062, ATS9350-063
Replaced product ATSGPU-1YR with ATSGPU-001
Updated description for product ATSGPU-101

Section, Page
Master/Slave Systems, pg. 4
Linux Support, pg. 6
Export Control Classification, pg. 6
Ordering Information System, pg. 9
Ordering Information System, pg. 9
Ordering Information System, pg. 9
Ordering Information System, pg. 9

Changes from version 2.0A (Nov. 2013) to version 2.0B

Added Python to list of SDK supported languages, and Support for Windows & Linux
Added Python & LabVIEW to list of supported languages for ATS-SDK, removed ATS-VI
Updated TTL Input Impedance for External Trigger
Modified AlazarDSO description
Updated ATS-SDK description: added Python, removed ATS-VI
Added ATS-GPU description
Replaced section *ATS-Linux* with *Linux Support* that includes download link & updated description
Added section on RoHS compliance
Added section on EC Conformity
Added section on FCC & ICES-003 Compliance
Added TTL specification to *Comparator Type*, and *Trigger Sensitivity*
Added TTL Input Range and TTL Input Impedance for External Trigger
Updated list of Certification and Compliances
Corrected part numbers for *SyncBoard-9350 2x*, *SyncBoard-9350 4x*, *ATS9350-LINUX*
Removed product ATS-VI (ATS-SDK now supports LabVIEW)
Added products ATS9350-020, ATS9350-021, ATS9350-022, ATSGPU-1YR, ATSGPU-101

Section, Page
Features, pg. 1
Overview, pg. 1
External Trigger Input, pg. 5
AlazarDSO Software, pg. 6
Software Development Kits, pg. 6
ATS-GPU, pg. 6
Linux Support, pg. 6
RoHS Compliance, pg. 6
EC Conformity, pg. 7
FCC & ICES-003 Compliance, pg. 7
Triggering System, pg. 8
TRIG IN (External Trigger) Input, pg. 8
Certification and Compliances, pg. 8
Ordering Information, pg. 8
Ordering Information, pg. 8
Ordering Information, pg. 8